


NAVY KAP-HN RANGE

AT HOME ON THE SEVEN SEAS

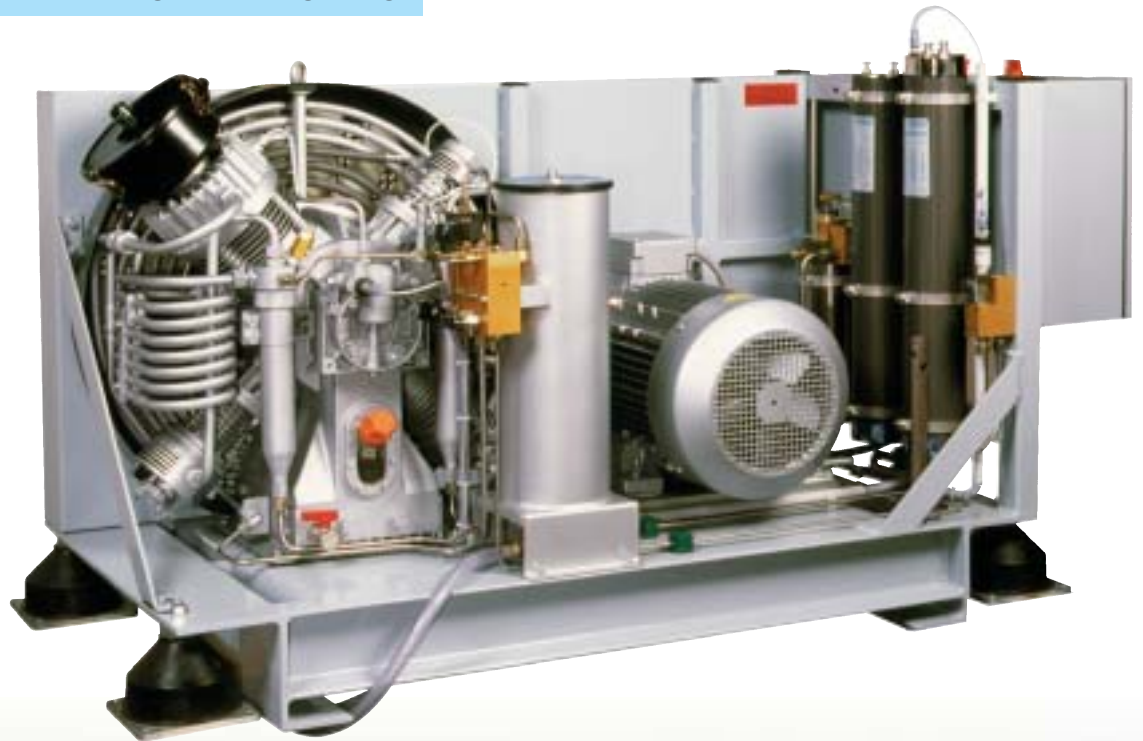

370 - 660 l/min

The new KAP-HN range operates under arduous military conditions.

The KAP-HN range was specifically designed for the strong NAVY requirements, i.e. shock- and vibration-proof acc. to MIL-standard. For operation on heavy sea and extreme inclinations either on frigates, corvettes or mine-sweepers.

The highly efficient P41-DUO filter system guarantees purest breathing air acc. to MIL-standard and breathing air standard DIN EN 12021.




ROBUST AND EXPANDABLE



extremely robust blocks



operation even on heavy sea

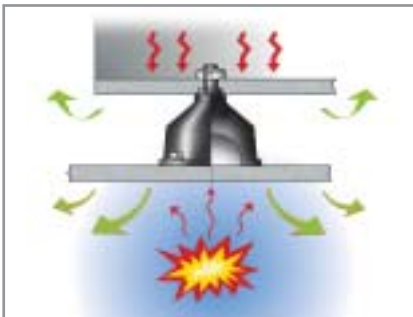

highly developed shock- and vibration elements

VIBRATION-PROOF

The **ingenious unit design** with **fine balanced electrical drive**, vibration optimized, **cross tied frame construction** and **vibration damped block** as well as **special shock- and vibration elements** isolate the unit effectively from the ship. This fulfills **MIL-S-901-D, grade A, type A, class 1** and **BV 043** (max. 6 G up to 20 ms).

ALWAYS IN USE

The **low center of gravity** and the block design allow the operation **even on heavy sea** (roll: 30°/max. 10 sec.; pitch: 10°/max. 6 sec.)

EXTREMELY ROBUST, AIR-COOLED BLOCKS

Piston rings made of newly developed **high-tech plastics** and **plasma-nitrited cylinders** show almost **no more wear and tear**. The **industrial roller bearings** are made for more than **30.000 operating hours**. Inter- and after coolers are made of **stainless steel** for **improved resistance to corrosion**.

COMPLETE EQUIPMENT

The units are delivered **complete** and **ready for operation** with integrated electronic compressor monitoring **B-CONTROL** for a fully automatic operation.

EXPANDABLE FOR ANY REQUIREMENTS

Various accessories allow a **flexible adaptation to various requirements**: with an **external filling panel** 6 storage cylinders can be filled simultaneously (standard scope of supply does not include any filling devices!). **Storage solutions** assure constant availability in case of quick and high air requirement. The **SECURUS filter monitoring** (optional) guarantees always purest breathing air quality.

TECHNICAL DATA

Model max. 330 bar / 5000 psig ¹⁾	FAD ²⁾		Dreh- zahl min ⁻¹	Motor		Comp.- stages	Filter- system	Approx. dimension cm			Weight net kg
	l/min	m ³ /h		kW	HP			L	W	H	
KAP 15.1-7,5-HN	370	22,2	1050	7,5	10	4	P41 DUO	165	78	90	480
KAP 150-11-HN	540	32,4	1230	11	15	4					505
KAP 180-15-HN	660	39,6	1320	15	20	4					520

¹⁾ also available with switch over device
330 / 225 bar (5000 / 3300 psig) = HU type

²⁾ cylinder filling from 0 to 200 bar (0 to 3000 psig)



BAUER KOMPRESSOREN GmbH

P.O.BOX 710260 · D-81452 MÜNCHEN
DRYGALSKI-ALLEE 37 · D-81477 MÜNCHEN
PHONE 0049 89 78049-0
FAX 0049 89 78049-167
Internet: www.bauer-kompressoren.de
e-mail: info@bauer-kompressoren.de